




# E-MAX RTP-1

RTP-1 MONITOR - ANNUNCIATOR

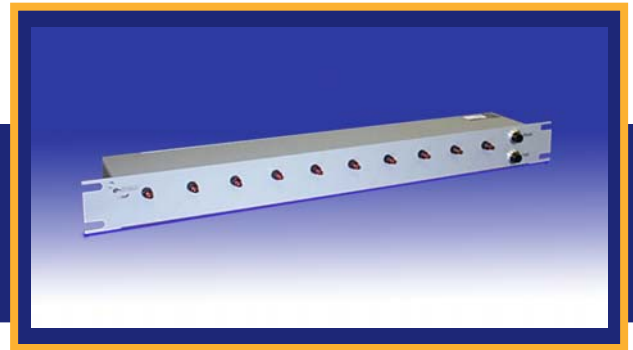

- Low Power
- Latched memory
- Single System Test Switch
- Front Panel Reset Switch
- Rack Mount Chassis

The RTP-1 Monitor is a new general purpose annunciator. Designed for 19" rack installations, the RTP-1 is complete with a noise immune filter. The ten point RTP-1 features latching memory. Easy to install and easy to operate, this low power monitor has front panel plug-in replaceable LEDs for indication and a single system Test and Reset buttons. Easy to install and easy to operate

## ORDER INFORMATION

Part Number	Input Power
101D140	125 Vdc
101D141	48 Vdc
101D142	250 Vdc
101D143	120 Vac

## SPECIFICATIONS

<b>Number of Points:</b>	10
<b>Input Power:</b>	48 Vdc 125 Vdc 250 Vdc
<b>Input Contact Type:</b>	Normally Open
<b>Contact Rating:</b>	125 Vdc 0.5 A resistive
<b>Outputs:</b>	Visual Indication Plug-in replaceable Red LED ( <i>note polarity when changing LED</i> )
<b>Point Identification:</b>	Adhesive backed black laminate/white core nameplates (optional) Nameplate dimension 1.00 x 0.63 (dimension in inches) <i>Engraving of Nameplates available upon request</i>
<b>Fuse:</b>	1 A Type: 3AG
<b>Isolation:</b>	Point to Point Point to Ground
<b>Environmental:</b>	Operating Temperature: -20 to 55° C Storage Temperature: -55 to 70° C
<b>Surge Withstand:</b>	ANSI/IEEE C37.90a-1989 Surge Withstand Capability
<b>Dimensions:</b>	19.0 w x 1.75 h x 4.0 d (dimensions in inches)

**Contact Wiring** Field contact wiring for points 1-5 is made on TB1, points 6-10 on TB2. Input power is connected to TB1. All terminal blocks are mounted on the rear panel of the RTP1.

## RTP-1 CHASSIS DIMENSIONS

ALL DIMENSIONS IN INCHES

